



KREMLIN, from the house of KREMLIN SOLUTIONS, is one of the leading tile adhesive & Grout Companies in North India. We are committed to providing our customers with cutting-edge tile and stone fixing solutions. KREMLIN SOLUTIONS products are technologically advanced bringing in global expertise with local intelligence.

We are committed to a continual process of innovation and consistency to remain ahead of the curve vis-vis our offerings. KREMLIN SOLUTIONS has expanded its manufacturing footprint across the country, with its state-of-the-art infrastructure; ensuring quality, consistency and prompt service making it an Industry leader among the myriad tile adhesive brands. We are dedicated to delivering a wide range of products that adhere to both Indian and german technical standards across all our plants. With over good manufacturing plants and many trained personnel, KREMLIN is fully equipped to provide on-site technical assistance for product recommendations, sample testing and problem redressal making it a pioneer among the other tile adhesive brands.

In our endeavor to deliver long-lasting solutions, we acknowledge the role of architects in creating awareness about best-in-class global practices. We ensure last-mile delivery by training applicators and contractors across the country to ensure the best results for the customers.





SILVER-101

TILE ADHESIVE

TYPE-1

APPLICATION AREA :

Fixing all type of tiles on Interior Area on Floor & Wall.

FEATURES :

Self Curing | Easy to Mix and application | High Bond strength | Economical

PACK SIZE :

20 kg Bag.

COLOR :

Grey and White

Storage and Shelf life :

12 months form date of Mfg. when store under Dry Conditions.

COVERAGE :

Approximate 30-35 SQFT 20 kg bag 4 to 5 mm Thickness.

Technical Details

Norms :

IS Type-1

Bed Thickness :

3 to 10 mm

Mixing Ratio :

5 to 6 lt of water per 20 kg bag

Open Time :

15 minutes

Pot Life :

1 hr

Setting Time :

24 hrs

Full Strength :

After 28 Days

Tensile Adhesion :

> .75 N/mm2 Dry Condition @14 days.



Ready to Use



Single Component



Good Coverage





GOLD-501

TILE ADHESIVE

EN C1 E

APPLICATION AREA :

KREMLIN GOLD-501 is a High Polymer modified cement based versatile and all-rounder Tile Adhesive specially designed for application of heavy duty tiles including Vitrified tile on Internal and external, Vertical and horizontal surfaces. This tile adhesive is ideal for use in green buildings.

For fixing heavy duty tiles and large format tiles on Internal /External wall and floor surface.

FEATURES :

Self Curing | Easy to Mix and application | High Bond strength | Water Resistance | Better Work ability.

PACK SIZE :

20 kg Bag.

COLOR :

Grey and White

Storage and Shelf life :

12 months form date of Mfg. when store under Dry Conditions.

COVERAGE :

Approximate 30-35 SQFT 20 kg. bag 4 to 5 mm Thickness.

Technical Details

Norms :

EN C1 E

Bed Thickness :

3 to 10 mm

Mixing Ratio :

5 to 6 lt of water per 20 kg bag

Open Time :

20 minutes

Pot Life :

1 hr

Setting Time :

24 hrs

Full Strength :

After 28 Days

Tensile Adhesion :

> 1 N/mm² Dry Condition @28 days EN-1348

ADHESION AFTER HEAT / WATER IMMERSION

>.5 N/mm² @ 28 days EN-1348



FASTER APPLICATION



STRONGER BOND



ALL TILE TYPES





DIAMOND-701

TILE ADHESIVE

EN C2 TE

APPLICATION AREA :

FEATURES :

PACK SIZE :

COLOR :

Storage and Shelf life :

COVERAGE :

Technical Details

Norms :

Bed Thickness :

Mixing Ratio :

Open Time :

Pot Life :

Setting Time :

Full Strength :

Tensile Adhesion :

Shear Adhesive :

Adhesion After Heat / water Immersion Deformation

KREMLIN DIAMOND-701 is a ECO FRIENDLY High Polymer modified cement based ready to use Tile Adhesive. Diamond-701 Adhesive use for fixing of Indian or forging made ceramic and vitrified tiles of all kind and size stable and natural stone. Suitable for internal and external areas. This tile adhesive is ideal for use in green buildings.

Specially formulated for fixing of glass mosaic tile, marble, granite, terrazzo and natural stone in interior and exterior location.

High Bond strength | Excellent Water and frost Resistance | Better Work ability | High performance | Highly polymer modified.

20 KG BAG

Grey and White

12 months form date of Mfg. when store under Dry Conditions.

Approximate 30-35 SQFT 20 kg. bag 4 to 5 mm Thickness.

EN C2 TE

3 to 10 mm

5 to 6 lt of water per 20 kg bag

30 minutes

1 hr

24 hrs

After 28 Days

> 1.3 N/mm² Dry Condition @28 days EN-1348

> 1 N/mm² under Dry Condition@28 Days

>.5 N/mm² @ 28 days EN-1348



HIGH TENSIL



WATER RESISTANT



NON SHRINK





PLATINUM-901

MULTI-PURPOSE FLOOR & WALL ADHESIVE

KREMLIN PLATINUM-901 Premium Adhesive of a professional Grade, polymer modified thin set Adhesive for interior and exterior floor and wall applications of all types of Tiles & Stones. This product has flexibility, adhesion and excellent water resistance and weather resistance performance for heavy tile and stone. Suitable for internal and external areas. This tile adhesive is ideal for use in green

Suitable for Marble, Glass tiles glass mosaics and most types of tile and stone especially the large format low water absorption tile.

Self Curing | Easy to Mix and application | High Bond strength | Economical | Flexible

C2 TE S1

APPLICATION AREA :

FEATURES :

PACK SIZE :

COLOR :

Storage and Shelf life :

COVERAGE :

20 kg. bag

Grey and White

12 months form date of Mfg. when store under Dry Conditions.

Approximate 30-35 SQFT 20 kg. bag 4 to 5 mm Thickness.

Technical Details

Norms :

C2 TE S1

Bed Thickness :

3 to 10 mm

Mixing Ratio :

5 to 6 lt of water per 20 kg bag

Open Time :

40 minutes

Pot Life :

1 hr

Setting Time :

24 hrs

Full Strength :

After 28 Days

Tensile Adhesion :

> 3 N/mm 2 Dry Condition @28 days EN-1348

Shear Adhesive :

> 3 N/mm 2 under Dry Condition@28 Days

**Adhesion After Heat :
/ water Immersion
Deformation:**

> 1 N/mm2 @ 28 days EN-1348

> 2.5 mm EN 12002



HIGHLY FLEXIBLE



WATER RESISTANT



GEL BASE





EPOXY GROUT

KREMLIN Epoxy Grout is Two Part Epoxy comprising of Part-A & Part-B for ease of application and the ability to fill tile and stone joints the grout is best mixed to smooth creamy consistency. It is 100% solid Epoxy Grout with high chemical and stain resistance with smooth finish. It is non shrinking non sagging fast curing efflorescence free grout. It is ideal for installation where high strength mold and mildew resistance grout joints are required. It has high temperature, Resistance and can be stem cleaned suitable for joints between 2 to 10 mm in width.

Area of Application

Floor and wall tiles in residential, industrial and commercial buildings
Terrace and balconies and Swimming pools.

Features:

- High Bonding
- Highly water proof
- Easy to use and clean • Anti cracking • UV Resistance
- Resin based non dusting/Abrasion
- compressive and tensile strength (Ensure carefree joints up to life of the tile and stone) • Excellent matching of colors of tile and stone.
- Stain free and Resistance against fungal and other bacterial issues.

Shelf life

24 Months when kept in original packing in Dry Place.

Pack Size

5 kg. Box

Color

Refer to Shade Card

Technical Details

3 to 10 mm

Creamy Paste
= \geq 65 N/mm²
= \geq 25 N/mm²

Approx 4100 n/mm²
Min 10* C and Max 40* C

FROM +12°C to +30°C
FROM +18 to +23°C



Colour Fast



Water & Shock
Resistant



Non Cracking &
Powdering



Easy To Clean



Stain Resistant



Chemical &
Temperature
Resistant



uv resist

- Joint Width
- Mixing Consistency
- Compressive Strength
- Adhesion to Tiles & Stone
- Abrasion Resistance
- Application Temperature
 - Permitted
 - Recommended



POLYMER TILE GROUT

Kremlin Grout is a cement and polymer modified tile joint filler. It effectively fills the gaps and levels it self to give hard wearing and non dusting tile joints. It firmly holds the tiles together to give a long life to tiles. It can be used for 1 mm to 6 mm joint width.

Area of Application

Residential, Commercial area.

Features:

Polymer modified grout
Easy to use and clean
Good compressive strength
Non dusting
High Bond

Pack Size

1 kg and 20 kg Bag

Color

Refer to shade card

Technical Details

Joint Width 1 mm to 6 mm

Curing Time

24 Hrs

Mixing Ratio

Approx 400ml water per kg of grout.

Compressive Strength

$\geq 25\text{N/mm}^2$



Water Resistant



Stain Resistant



Smooth & Gloss Finish



Weather Resistant



Non Cracking





GROUT ADMIX

Kremlin Admix is a milky white emulsion suitable for cement based grouts. It finds its application under both dry and wet conditions in Interior and exterior locations.

Area of Application

Residential and Commercial.

Features:

- Excellent work ability
- Easy to use and apply
- Provide superior mechanical strength to tile edges.
- Provides increased abrasion resistance
- Reduce efflorescence

Shelf life

12 months from date of manufacturing when stored under dry condition

Pack Size

Pack Size: 100 ml Bottle.





TILE CLEANER

Kremlin Tile cleaner is a powerful heavy duty cleaning solution for floor and wall tiles. It removes tough stains and other type stains. It can be used for daily maintenance also suitable for cleaning effectively and easy to use.

It is designed for rapid removal of Cement and mortar Stains, Oil, Grease, algae, moss and wax from Tiles.

Area of Application

Features:

- Powerful Formula
- Removes cement films
- Easy to apply
- Remove residues Efflorescence and most oxide stains.

How to Apply

Dilute the Tile Cleaner in cold water and pour the solution on the floor or wall manually with abrasive pad or floor machine with pad. Remove the residue liquid with clothes or possible with wet vacuum and rinse with plenty of water let it dry.

Pack Size

1 Ltr. bottle

Shelf life

12 months from the date of mfg.



PH Neutral Formula



Gentle



SPACERS

Spacers :


For giving gap between tile during tile fixing. Enables the floor/wall tiles to have straight and even grout spacing.

Features :

- To keep the tiles at equal distance & create even grout lines.
- Ensure tiles' uniformity & enhance design
- Ability to change individual tiles without damaging adjacent tiles.
- Less effort & time with smoother installation



Available Size:

2, 3, 4 & 5 mm

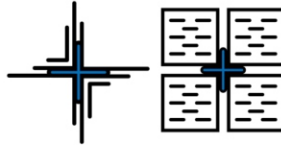

LOCK TILE SPACER

The tiles wedge leveling kit does the 2 in 1 job of creating even spaces between tiles and to align tiles, so you get a perfect even groove in your tiles at the same time eliminating any lippage. The tile wedge leveling system is very easy to learn and use. This tiles spacer and wedge leveling kits are compatible with all types of Tiles: such as porcelain, ceramic, vitrified, marble and all-natural stone. Wedges are universal in size and they can be Reusable until it gets wear out, Clips can be used only once.

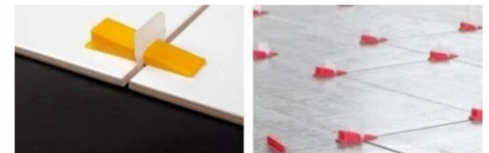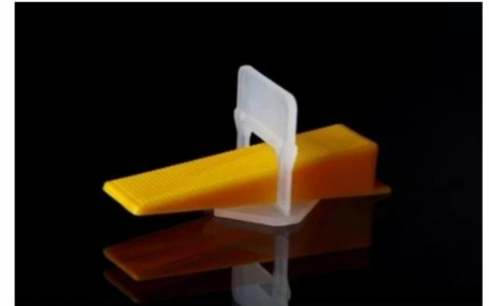


SPARKLES

Specially designed filler mainly used to create particular special effects in epoxy tile grout.

it is to be mixed with epoxy grout 2 part/ 3 part to get special effect and enhance the beauty of the product.

- Easy to mix, apply & clean
- Enhance aesthetic look of tiles Stain free & easily ...cleanable with water (under fresh condition)

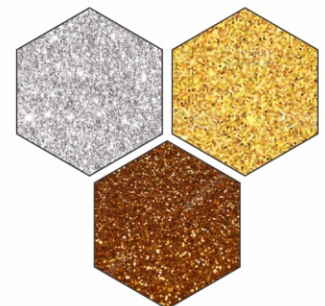



TILE ADHESIVE | EPOXY GROUT
BLOCK ADHESIVE | READY- MIX PLASTER | POLYMER GROUT
GROUT ADMIX | WALL PUTTY | TILE CLEANER



Contact No.: 1800-2588-152 | E-mail: info@kremlinsolutions.com

Website: www.kremlinsolutions.com